

Conveyor Belts for Bucket Elevators



Ammeraal Beltech is a leading manufacturer of process and conveyor belting with an established reputation for developing innovative solutions for belting applications.

Our experience and extended application knowledge enabled Ammeraal Beltech to develop three ranges of plied synthetic PVC covered belts for bucket elevators.

Materials in granular form are often vertically transported to a higher positioned hopper, a silo, or another floor. Using buckets on the conveyor belt requires high strength. Proper belt selection and belt installation with buckets are critical steps in achieving an efficient installation without common problems such as jams, bucket failures, and broken belts.

Main features

- Very low elongation; belts with 2 or 3 fabrics
- Compliance with EC and FDA
- No tearing by buckets; high loading capacity
- Resistant to oils and harsh operation conditions such as high temperature, humidity, and shock loads
- Fabrics coated on both sides – reduced product contamination compared to conventional fabric belts
- No electrostatic build-up – antistatic acc. to ISO 21178
- Flame Retardant ISO-340
- ATEX-2 compliance for use in potentially explosive areas

Benefits

- Food & People Safety Concept
- Longer belt life
- Reduced maintenance costs
- Low energy consumption

Typical application

- Sugar, flour, salt, and soya
- Grains, seeds, and general granular food

Innovation & Service in Belting

Ammeraal Belt Range for Bucket Elevators and Silos Loading


Article No.	Nomenclature	No. of piles	Thickness [mm]	Weight [kg/m ²]	Force at 1% elongation [N/mm]	Breaking load [N/mm]	Flexing/back flexing diam. [mm]	Oil & fats resistance
579259	Arcon EF 16/2 10 + 20 white M1 AS FR FG	2	5.0	6.5	20	300	140/190	3
576279	Arcon EF 24/3 10 + 20 white M1 AS FR FG	3	6.0	7.6	30	500	200/250	3
576299	Arcon EF 50/3 15 + 30 white M1 AS FR FG	3	9.5	12	75	1000	400/500	3

Belts are in compliance with ATEX directives

M1 = fine matte finish, AS = anti-static, FR = flame-retardant, FG = food grade


A high workload requires strength. In conventional multilayer cotton elevator belts, it is provided by fabric layers containing rubber in between. It looks the same with plied rubber covered belts. Alternatively, solid woven belts with PVC can be used. Increased requirements, such as lower energy consumption, demand new belt constructions. Our range of PVC belts for bucket elevators meets these requirements.

The Ammeraal Beltech PVC cover guarantees a proper protection of the fabric layers against ambient conditions and negative impacts of the product conveyed. The cover is resistant to many chemicals, abrasion, and impact. Our PVC has proven to be highly reliable. The high-quality synthetic material combined with strong polyester fabrics ensure elasticity and low belt weight.

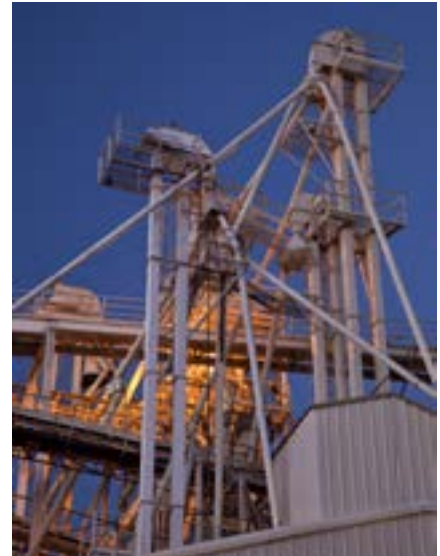

One-Stop Belt Shop

- Knowing your process** Industry and product knowledge are the foundation of an innovative and service-oriented organization
- All your belting needs** Ammeraal Beltech developed a wide range of belting solutions and accessories to improve hygiene levels and protect against bacteria and foodborne diseases
- Just-in-time delivery** Worldwide distribution and large service network



Expert advice and quality solutions for all your belting needs.
ammeraalbeltech.com

Ammeraal Beltech
 Ammeraal Beltech Inc.
 Skokie, Illinois

T +1 800 533 3765
info-us@ammeraalbeltech.com

ammega.com

This information is subject to alteration due to continuous development. Ammeraal Beltech will not be held liable for the incorrect use of the above stated information. This information replaces previous information. All activities performed and services rendered by Ammeraal Beltech are subject to general terms and conditions of sale and delivery, as applied by its operating companies.