

# Flexam Solid Woven Heavy Duty PVC Belts for Logistics





# High Performance for the Logistics Industry

Solid woven polyester coated with PVC provides excellent tear and impact resistance along with dimensional stability, delivering high performance solutions for today's evolving logistics industry.


## Logistics made better

**Flexam SW** is a premium quality belting product range for the logistics industry.

**Flexam SW** (SW stands for Solid Woven), is a belting type originating out of North America which has become an industry standard.

**Flexam SW** will be available globally at the same Ammeraal Beltech quality you have come to enjoy with our other products.

Six belts are available in different strengths (100, 125 & 150), some with a PVC top cover or A34 profiled cover for inclines. The impregnated carcass without a cover is the most popular belt in our Flexam SW belting range.

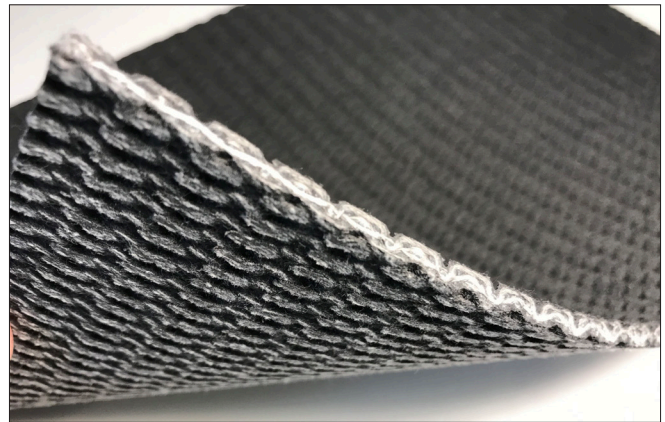

*Our SW belt is comprised of a single ply s-weave carcass impregnated with our familiar Flexam PVC formulation.*


## Available finishes



**M2 Matte cover**



**Friction surface**

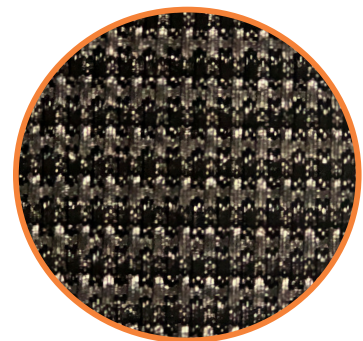

**A34 Profile cover**



### Features

Impact, abrasion, cut and tear resistant

Good lace retention properties

Flame retardant according ASTM-D378

High strength belts available

Laterally rigid

Grip profile for steep inclines available

### Benefits

Quick & simple belt installation possible with mechanical fastener

Low maintenance & long service life

Less elongation than common conventional PVC belting

Lower total cost of ownership

## Technical belt data

Item Code	Description	Working Tension [N/mm]	Force at 1% Elongation* [N/mm]	Belt Thickness [mm]	Weight [lbs./ft. <sup>2</sup> ]	Coefficient of Friction: Bottom/Top [Dynamic]	Min. Pulley Bottom/Top flexing ** [mm]
589530	Flexam SW100 00+01 black	18.0	8.0	3.0	0.594	0.25 / 0.3	50 / 50
589548	Flexam SW100 00+03 black M2	18.0	8.0	3.2	0.717	0.25 / 0.6	63.5 / 76
589531	Flexam SW125 00+01 black	21.0	9.0	3.8	0.737	0.25 / 0.3	76 / 76
589549	Flexam SW125 00+04 black M2	21.0	9.0	4.1	0.881	0.25 / 0.6	89 / 101.5
589550	Flexam SW125 00+A34 black	21.0	9.0	6.5	1.188	0.25 / 1.1	140 / 178
589532	Flexam SW150 00+01 black	25.0	10.0	4.6	0.881	0.25 / 0.3	101.5 / 101.5

\*k1% relaxed value established in line with ISO 21181:2005

\*\* The minimum drum diameter dimensions were established at room temperature. Lower temperatures require increased drum diameters. Belts with profiles or sidewalls might require larger drum diameters. Diameter dimensions do not apply to conveyor belts with mechanical fasteners.

## Our belt description explained

	Flexam	SW100	00	+ 03	Black	M2
1	Type of top cover					
2	Type and strength of fabric					
3	Bottom (cover) thickness or profile style					
4	Top (cover) thickness or profile style					
5	Colour of the top cover					
6	Additional					

## Typical applications

Item Code	Description	Unloader	Incline [up to 20°]	Collection	Transport	Sortation	Accumulation	Industry Nomenclature
589530	Flexam SW100 00+01 black	●					●	PVC 100 FSxFS
589548	Flexam SW100 00+03 black M2	●			●			PVC 100 CxFS
589531	Flexam SW125 00+01 black				●		●	PVC 125 FSxFS
589549	Flexam SW125 00+04 black M2	●						PVC 125 CxFS
589550	Flexam SW125 00+A34 black		●					PVC 125 MRTxFS
589532	Flexam SW150 00+01 black			●	●	●	●	PVC 150 FSxFS

## Haven't Found What You Are Looking For?

Ammeraal Beltech is your global supplier for the best PVC belts in the business. Check out our other product families belonging to our logistics & airport product range:

**FLEXAM EX:** Our EX range is **energy efficient**. EX fabric makes use of a special polyester fibre weave that reduces energy consumption & noise. Minimum elongation makes it easy to track. Not suited however for impact loading.

**FLEXAM IR:** Our Impact Resistant range incorporates the best of both worlds! A true hybrid, the belt's behaviour is much like a Flexam belt in terms of energy efficiency and tracking, however it retains the strength, cut resistance and lateral stiffness characteristics of **Flexam SW**.

# Locations in the Americas

...and find your local distributor at [ammeraalbeltech.com](http://ammeraalbeltech.com)

## CANADA

**General Contact Information:**  
Ammeraal Beltech Inc.  
Mississauga, Ontario  
T +1 800 455 3337  
[info-ca@ammeraalbeltech.com](mailto:info-ca@ammeraalbeltech.com)

## LATIN AMERICA

**Argentina**  
Buenos Aires, Argentina  
T +54 11 4218 2906  
[info-ar@ammeraalbeltech.com](mailto:info-ar@ammeraalbeltech.com)

**Chile**  
Santiago, Chile  
T +56 2 233 12900  
[info-cl@ammeraalbeltech.com](mailto:info-cl@ammeraalbeltech.com)

**Colombia**  
Bogota, Colombia  
T +57 893 9890  
[info-co@ammeraalbeltech.com](mailto:info-co@ammeraalbeltech.com)

**Mexico**  
Mexico City, Mexico  
T +52 55 5341 8131  
[info-mx@ammeraalbeltech.com](mailto:info-mx@ammeraalbeltech.com)

## UNITED STATES

**General Contact Information:**  
Ammeraal Beltech Inc.  
Skokie, Illinois  
T +1 800 533 3765  
[info-us@ammeraalbeltech.com](mailto:info-us@ammeraalbeltech.com)


**Conveyor Belts:**  
Ammeraal Beltech Inc.  
Skokie, Illinois  
T +1 800 533 3765

**Modular Belts:**  
Ammeraal Beltech – Uni  
Reading, Pennsylvania  
T +1 610 568 9097

**Engineered Belts:**  
Ammeraal Beltech Inc.  
Jefferson, Pennsylvania  
T +1 724 883 5000



**Expert advice and quality solutions  
for all your belting needs.**

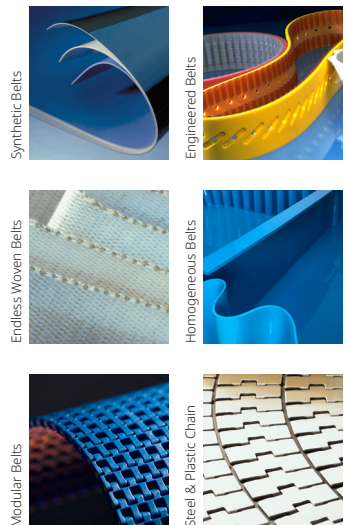

**International general  
contact information:**

**Ammeraal Beltech Holding B.V.**  
P.O. Box 38  
1700 AA Heerhugowaard  
The Netherlands

T +31 (0)72 575 1212  
[info@ammeraalbeltech.com](mailto:info@ammeraalbeltech.com)

**[amma.com](http://amma.com)**